



# VTA12-35 (12V 35AH/20HR) SEALED LEAD ACID Battery

VALIANT VTA series are designed with AGM technology and high-performance lead plates using 99.99% virgin lead. VTA is perfectly suited for backup power systems such as UPS, security, and emergency lighting systems. They are sealed maintenance free and valve regulated, also referred to as VRLA and SLA.

**12V  
35Ah**

**AGM  
Technology**




**COMPLIED STANDARDS**  
IEC 60896-21/22      JIS C8704  
YD/T799              BS6290 part4  
GB/T 19638              CE

## Applications

- UPS
- Emergency Lighting
- Electric Scooter
- Mobility

## Dimensions & Weight

|                       |          |
|-----------------------|----------|
| Length(mm/inch)       | 196/7.72 |
| Width(mm/inch)        | 130/5.12 |
| Height(mm/inch)       | 155/6.11 |
| Total Height(mm/inch) | 167/6.58 |
| Weight(kg/lbs)(±3%)   | 10/22.1  |

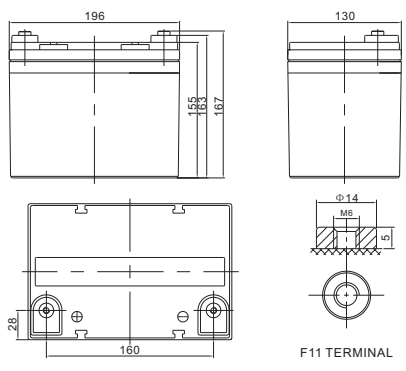

## Battery Discharge Table

## General Features

- Non-spillable construction design
- Long life span: 5-8 years in floating applications
- High Quality AGM separator: extends cycle life and prevents short circuit
- 99.99% virgin lead plates ensure high quality and high reliability
- Flame-resistant ABS material: increases the strength of battery container

## Technical Specifications

|   |                             |   |
|---|-----------------------------|---|
| Nominal Voltage                             |                             | 12V (6 cells per unit)                                      |
| Design Floating Life @ 25°C                 |                             | 8 Years   |
| Nominal Capacity @ 25°C                     | 20 hour rate@1.75A,10.8V    | 35Ah  |
|   | 10 hour rate (3.30A, 10.5V) | 33Ah  |
|   | 5 hour rate (5.6A, 10.5V)   | 28Ah  |
|   | 1 hour rate (21.4A,9.6V)    | 21.4Ah  |
| Capacity @ 25°C                             |                             |   |
| Internal Resistance                         | Full Charged Battery@ 25°C  | ≤11.0mΩ   |
| Ambient Temperature                         | Discharge                   | -15°C~45°C  |
|   | Charge                      | -15°C~45°C  |
|   | Storage                     | -15°C~45°C  |
| Max.Discharge Current                       |                             | @ 25°C 198A(5s)   |
| Capacity affected by Temperature (10 hour ) | 40°C                        | 105%  |
|   | 25°C                        | 100%  |
|   | 0°C                         | 85%   |
|   | -15°C                       | 65%   |
| Self-Discharge@25°C per Month               |                             | 3%  |
| Charge (Constant Voltage) @ 25°C            | Standby Use                 | Initial Charging Current Less than 8.25A Voltage 13.6-13.8V |
|   | Cycle Use                   | Initial Charging Current Less than 8.25A Voltage 14.4-14.9V |

## Discharge Constant Current per Cell (Amperes at 25°C)







| F.V/Time | 15min | 30min | 45min | 1h   | 2h   | 3h  | 5h  | 8h  | 10h | 20h  |
|----------|-------|-------|-------|------|------|-----|-----|-----|-----|------|
| 1.60V    | 56.6  | 34.5  | 23.1  | 21.4 | 12.3 | 8.7 | 5.9 | 3.9 | 3.5 | 1.89 |
| 1.65V    | 55.6  | 33.8  | 22.7  | 21.0 | 12.1 | 8.5 | 5.8 | 3.8 | 3.4 | 1.86 |
| 1.70V    | 54.5  | 33.2  | 22.3  | 20.6 | 11.9 | 8.3 | 5.7 | 3.7 | 3.3 | 1.82 |
| 1.75V    | 53.5  | 32.6  | 21.8  | 20.2 | 11.7 | 8.2 | 5.6 | 3.7 | 3.3 | 1.79 |
| 1.80V    | 51.5  | 31.3  | 21.0  | 19.4 | 11.2 | 7.9 | 5.4 | 3.5 | 3.2 | 1.75 |

## Discharge Constant Power per Cell (Watts at 25°C)

| F.V/Time | 15min | 30min | 45min | 1h   | 2h   | 3h   | 5h   | 8h  | 10h | 20h |
|----------|-------|-------|-------|------|------|------|------|-----|-----|-----|
| 1.60V    | 108.9 | 66.3  | 44.5  | 41.1 | 23.8 | 16.7 | 11.3 | 7.5 | 6.7 | 3.6 |
| 1.65V    | 107.0 | 65.1  | 43.7  | 40.4 | 23.3 | 16.4 | 11.1 | 7.3 | 6.5 | 3.6 |
| 1.70V    | 105.0 | 63.9  | 42.9  | 39.6 | 22.9 | 16.1 | 10.9 | 7.2 | 6.4 | 3.5 |
| 1.75V    | 103.0 | 62.7  | 42.0  | 38.9 | 22.5 | 15.8 | 10.7 | 7.1 | 6.3 | 3.4 |
| 1.80V    | 99.0  | 60.3  | 40.4  | 37.4 | 21.6 | 15.2 | 10.3 | 6.8 | 6.1 | 3.4 |



### Performance Characteristics

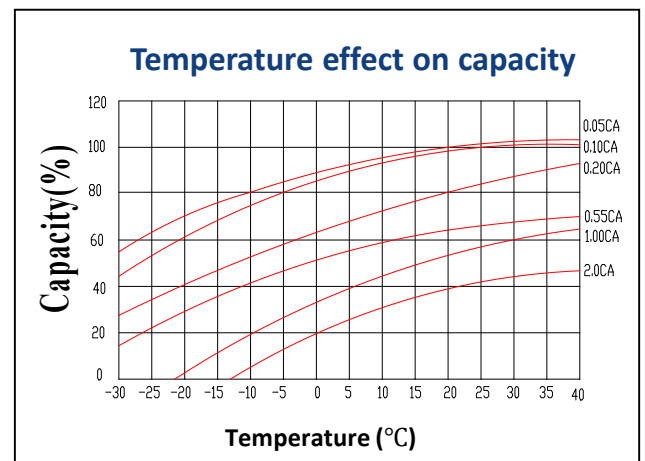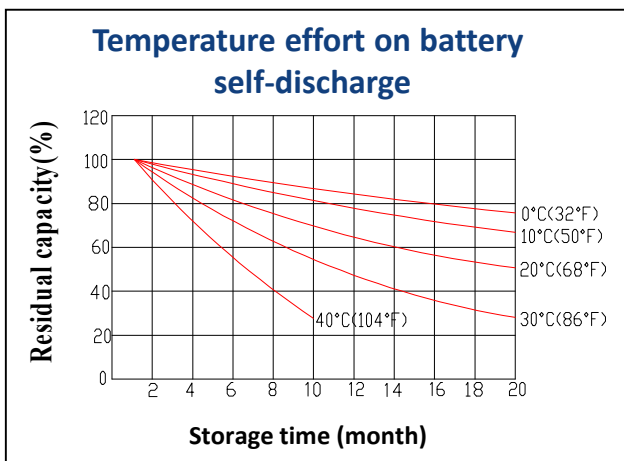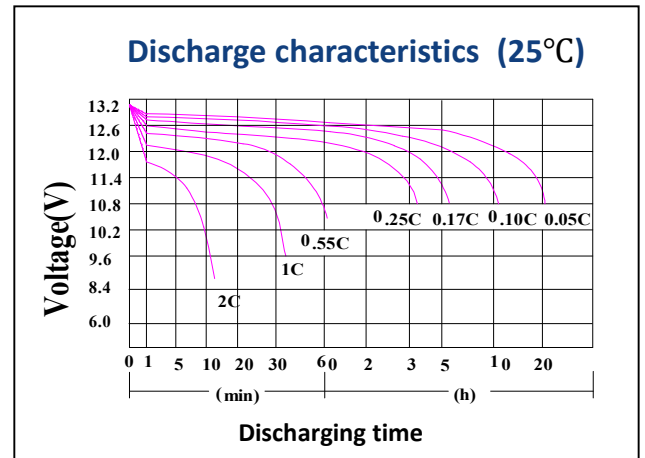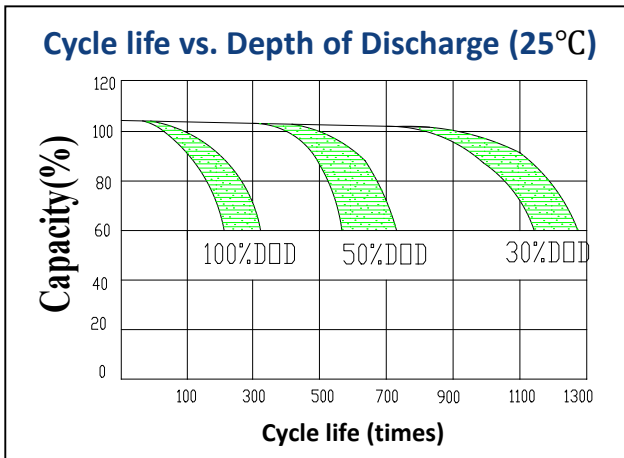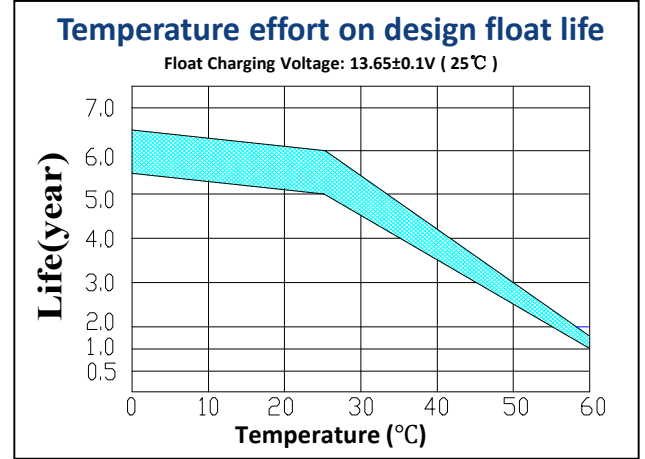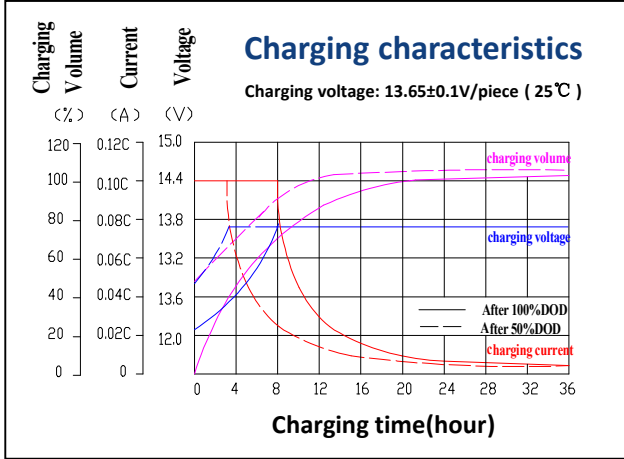

### Battery Construction

| Component | Positive Plate                               | Negative Plate  | Container & Cover      | Safety Valve                        | Terminal | Separator  | Electrolyte                      | Pillar Seal                 |
|-----------|--|---|------------------------|-------------------------------------|----------|--|----------------------------------|-----------------------------|
| Features  | Thick high Sn low Ca grid with special paste | Balanced Pb-Ca grid for improved recombination efficiency | ABS (UL94-V0 optional) | Flame Si-Rubber and aging resistant | M6       | Advanced AGM separator for high pressure cell design | Dilute high purity sulfonic acid | Two layers epoxy resin seal |