

ELECTRICAL CHARACTERISTICS	
Nominal Voltage	12.8V
Nominal Capacity	300Ah
Energy	3840Wh
Self Discharge	<3% / Month
CHARGE PERFORMANCE	
Maximum Charge Current	150A
Charge Voltage	14.6 +/- 0.2V
DISCHARGE PERFORMANCE	
Continuous Current	200A
Max. Pulse Current	350A (3S)
TEMPERATURE PERFORMANCE	
Charge Temperature	-30°C to 45°C (-22F to 113F)
Discharge Temperature	-20°C to 60°C (-4F to 140F)
MECHANICAL PERFORMANCE	
Dimension (L x W x H)	520 x 221 x 269 mm (20.82" x 8.70" x 10.59")
Weight	35kg (77.16lbs)
Cycle Life	>3000 cycles @ 1C 80% DOD
Series Connect	Max. 4 batteries connected
Parallel Connect	Max. 4 batteries connected
COMPLIANCE	
Shipping Classifications	UN3480, CLASS 9
MAINTENANCE	
Routine Charging	Charge and discharge every 3 months
Storage Temperature	0°C to 40°C (32F to 104F)



Features Bluetooth App
for IOS and Android!

Check Out This Product Online




Longer Life Cycle

Up to 20 times more cycle life and five times the float /calendar life than lead acid batteries, minimizing replacement cost and reducing total cost of ownership.



Light Weight


About 40% of the weight of a comparable lead acid battery. Footprints offer a 'drop in' replacement for lead acid batteries.




Higher Power

Delivers up to twice the power of lead acid battery at high discharge rates while maintaining high energy capacity.


Different Rate Discharge Curve

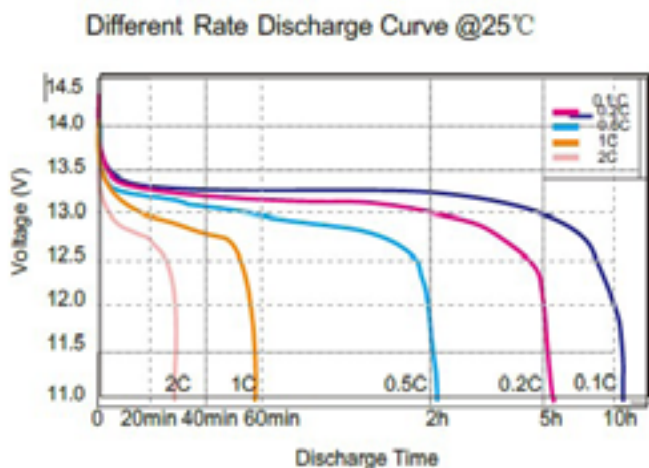


Different Temperature Discharge Curve

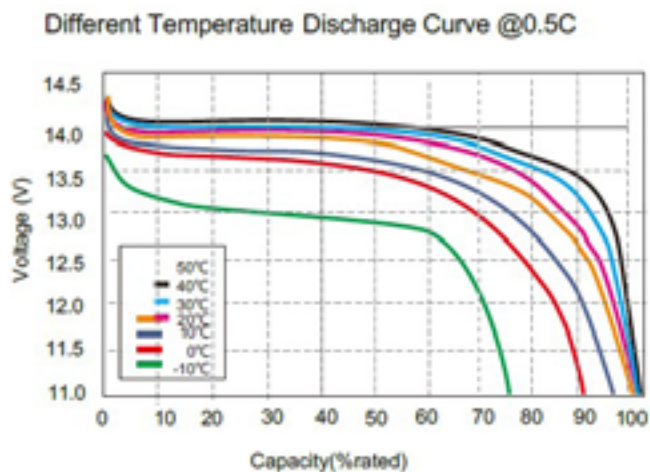


State of Charge Curve

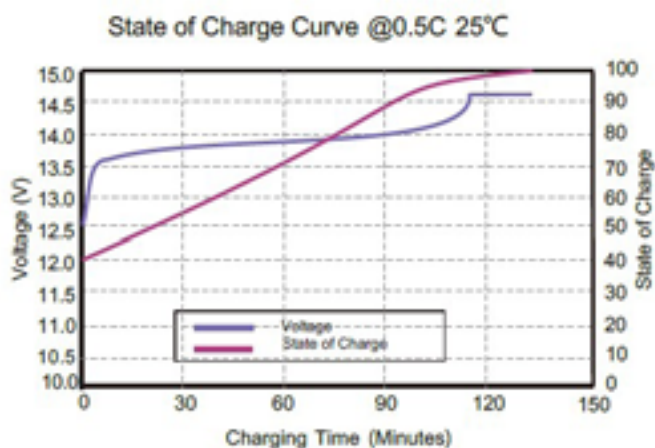

Charging Characteristics

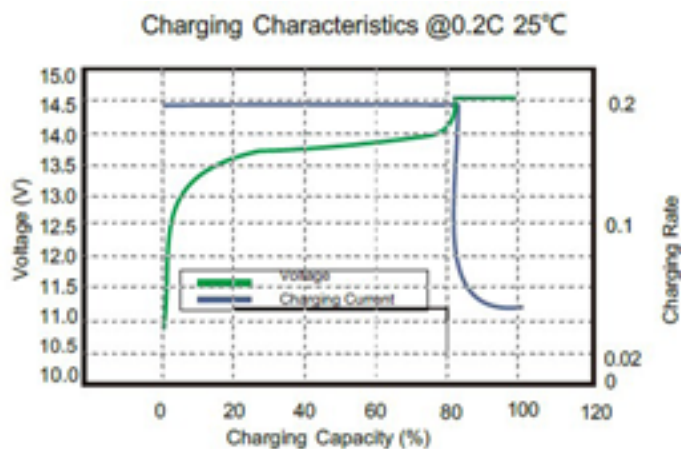

Cycle Life Curve

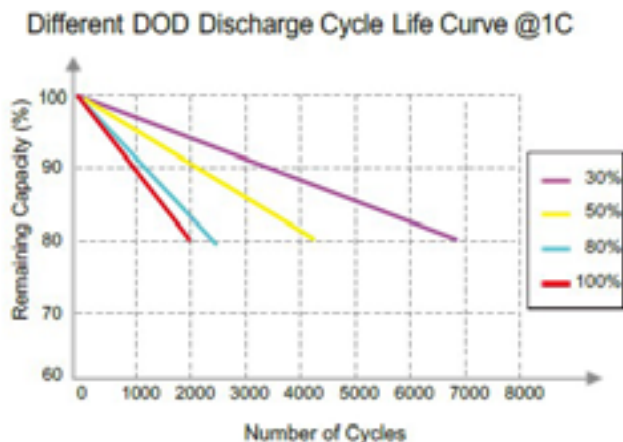

Self Discharge Characteristics Curve

